

Train Control ETCS system ETCS 1

ETCS System Compatibility Test Description

	Name	Signature Date	Signature
Written	Thomas Destrée		
Checked	Francisco Lozano		
Approved	Yves Werner		

This document is the property of Infrabel and contains confidential information. This document may not be reproduced to third parties within or outside Infrabel in any way whatsoever without the written permission of the service Signalling Projects.



History

Author	Version	Date	§ Adapted	Reason
T. Destrée	1.1 draft 1	16/09/2020	/	Creation of the document
T. Destrée	1.1 draft 2	9/12/20202		Review comments.
T. Destrée	1.1	11/12/2929		Major version
			§3	Correct name of the test case L1FS_3
T. Destrée	1.2 draft 1	1/02/2021	§4.9	Update to clarify test case ESC_L1FS_8.
		2/07/2021	Test cases ESC_TR_12, ESC_TR_15	Test cases adapted for trains without TBL1+ STM.
T. Destrée	1.2 draft 2	10/6/2021	Test cases ESC_TR_5, ESC_TR_7.1, ESC_TR_7.2	Transitions with TVM
T. Destrée	1.2	8/09/2021		Integration of review comments and major version.
T. Destrée	1.3	8/02/2022	ESC_TR_5, ESC_TR_7.1, ESC_TR_7.2	Remark added in the description of test cases involving TVM430.
T. Destrée	1.4 draft 1	12/09/2022	ESC_L1FS_5 ESC_L1FS_3	Minor correction in "Description" cell. Test case deleted
T. Destrée	1.4	7/11/2022	§1.2 §3	New version of the TST PLN ESC_L1FS_3 deleted. Major version
T. Destrée	1.5	16/11/2022	§1.2 §4.7.1 §4.14.2 §4.9	New version of [1]. Minor change in Starting conditions. P46 removed from the Figure. Testcase ESC_L1FS_8 deleted.

Abrogated documents

Name	Version	Date

Distribution	of the	documen	t
--------------	--------	---------	---

Server	<server id=""> <path></path></server>	
Intranet	<path></path>	
SharePoint	<name></name>	
Circular letter	<nr></nr>	
Message	<nr></nr>	
Note	<nr></nr>	
E-mail	<name></name>	@infrabel.be
	<name></name>	@<>
Paper	<name></name>	<address></address>

Announce of the publication of the document on intranet

	E-mail	<name>@infrabel.be</name>
--	--------	---------------------------



Table of Contents

1.	INTROD	UCTION	4
	1.1 Pur	POSE OF THE DOCUMENT	4
		IC DOCUMENTS	
		ERENCE DOCUMENTS	
	1.4 Ann	EXES	4
	1.5 Sco	PE	4
		INITIONS, SYMBOLS AND ABBREVIATIONS	4
		WN IMPERFECTIONS	
2.	ON-BOA	RD EQUIPMENT	5
3.		ONALITIES	
4.	TEST SC	ENARIOS	7
	4.1 TES	T ESC_L1FS_1: Train categories	7
	4.1.1	Description	7
	4.1.2	Scenario diagram	8
	4.2 TES	T ESC_L1FS_2: IREPOS	9
	4.2.1	Description	9
	4.2.2	Scenario diagram	10
	4.3 TES	TESC_L1FS_2_PART 2: IREPOS	11
	4.3.1	Description	11
	4.3.2	Scenario diagram	12
	4.5 TES	T ESC_L1FS_4: Crossing closed non-permissive signal without override	13
	4.5.1	Description	13
	4.5.2	Scenario diagram	14
	4.6 TES	T ESC_L1FS_5: CROSSING CLOSED NON-PERMISSIVE SIGNAL WITH OVERRIDE	15
	4.6.1	Description	15
	4.6.2	Scenario diagram	
	4.7 TES	T ESC_L1FS_6: CROSSING A CLOSED PERMISSIVE SIGNAL	17
	4.7.1	Description	17
	4.7.2	Scenario diagram	18
	4.8 TES	TESC_L1FS_7 : CR819	19
	4.8.1	Description	19
	4.8.2	Scenario diagram	19
	4.9 TES	T ESC_L1FS_8: INTENTIONNALY DELETED	20
	4.10 TES	T ESC_TR_5 : Transition Level 1 FS to TVM430	20
	4.10.1	Description	20
	4.10.2	Scenario diagram	
	4.11 TES	TESC_TR_7.1: Transition TVM430 to Level 1 FS	23
	4.11.1	Description	23
	4.11.2	Scenario diagram	24
	4.12 TES	TESC_TR_7.2: Transition TVM430 to Level 1 FS	25
	4.12.1	Description	
	4.12.2	Scenario diagram	26
	4.13 TES	T ESC_TR_12: Transition ETCS1 FS to STM TBL1+	
	4.13.1	Description	27
	4.13.2	Scenario diagram	
	4.14 TES	T ESC_TR_15: Transition STM TBL1+ to ETCS1 FS	29
	4.14.1	Description	29
	4.14.2	Scenario diagram	30



1. Introduction

1.1 Purpose of the document

The purpose of this document is to define the test scenarios to perform in order to prove the ETCS System Compatibility (ESC) between the trackside ETCS Level 1 with system version 1.Y and the Onboard.

The tests scenarios describe more in detail each "high level" scenarios defined in the ESC test plan [1]. The success of these test scenarios shall prove the technical compatibility between ETCS On-board and the Trackside part ETCS of the CCS subsystems within the ETCS1 with system version 1.Y area on Infrabel conventional network.

The technical specification for interoperability used inside an ETCS1 with system version 1.Y area on Infrabel network is the set of specifications 1, B2(Cfr [2] and [3]).

These test scenarios for ETCS system compatibility do not cover all design rules used in an ETCS1 area. If required, Infrabel can provide additional operational test scenarios performed during the verification that the trackside subsystem complies with the requirement of the TSI.

In case of doubt concerning the ESC of the board with the trackside, the railway undertaking shall take the required action with his supplier and inform Infrabel.

1.2 Basic documents

Ref.	Title	Owner
[1]	PSI (TC,ETCSsys,z) ESC TST PLN 1.6	Infrabel

1.3 Reference documents

Ref.	Title	Owner
[2]	Commission Decision (EU) 2012/88/EU of 25 January 2012	UE
[3]	Commission Decision (EU) 2012/696/EU of 6 November 2012	UE
[4]	PSI(TP,ETCSsys.L1LS.z) ESC TST DSC	Infrabel
[5]	PSI(TC,ETCSsys.L2,z) ESC TST DSC	Infrabel

1.4 Annexes

Ref.	Title
[6]	None

1.5 Scope

This document is applicable for all trains would run under the protection of ETCS level 1 in an ETCS1 with system version 1.Y area on the Infrabel conventional network.

1.6 Definitions, symbols and abbreviations

CCS	Control Command System
DMI	Driver Machine Interface
ESC	ETCS System Compatibility
ETCS	European Train Control System
IBG	Infill Balise Group
LS	Limited Supervision
NR	Not Relevant
SBG	Signal Balise Group
TSI	Technical Specification for Interoperab



1.7 Known imperfections

None

2. On-board Equipment

Out of scope of railway manager Infrabel.



3. Functionalities

The tested functionalities are described in the table here under:

Test scenario (ref ESC TST PLN [1])	Tested functionality
ESC_L1FS_1	Train categories
ESC_L1FS_2	IREPOS
ESC_L1FS_3	Test case deleted
ESC_L1FS_4	Crossing closed non-permissive signal without override
ESC_L1FS_5	Crossing closed non-permissive signal with override
ESC_L1FS_6	Crossing a closed permissive signal
ESC_L1FS_7	CR819
ESC_L1FS_8	Intentionally deleted
ESC_TR_1	ETCS 1 FS >> ETCS 1 LS (out of scope of this document)
ESC_TR_3	ETCS 1 LS >> ETCS 1 FS (out of scope of this document)
ESC_TR_5	ETCS 1FS >> TVM430
ESC_TR_7	TVM430 >> ETCS 1FS
ESC_TR_9	ETCS1 FS >> ETCS 2 FS (out of scope of this document)
ESC_TR_10	ETCS 2 FS >> ETCS 1 FS (out of scope of this document)
ESC_TR_12	ETCS 1 FS >> STM TBL1+
ESC_TR_15	STM TBL1+ >> ETCS 1 FS

The document will only describe the sequences to perform the scenarios but not all the actions to prepare the execution of the test scenarios.

Transitions to and from ETCS1 Limited supervision (ESC_TR_1 and ESC_TR_3) are covered in the ESC test DSC for ETCS1 LS program (cf. [4]).

Transitions to and from ETCS Level 2 (ESC_TR_9 and ESC_TR_10) are covered in the ESC test DSC for ETCS2 program (cf. [5]).



4. Test scenarios

4.1 Test ESC_L1FS_1: Train categories

4.1.1 Description

ID	Date			Location / Line	
ESC_L2FS_1 part1	<dd mm="" yyyy=""></dd>	y> <line></line>			
Description	Functionalities tested	:			
	Tests ESC_	L1FS_1 : train categories			
	This test does not no	eed to be repeated with all possible categories. The	e train categorie	s should not be the one associated	
	with the lowest speed	d profile.			
Signal passed	<u>. </u>				
Name			Trackside data	file in service	
Panel P1 at bk bk of the sp	eed panel> is at the be	ginning of a train category speed restricted area.			
Signal S1: <signal name=""> is</signal>	closed: Signal S1 is up	wards panel P1.			
Test Scenarios					
Starting condition	Track 1: track < Track	number>			
	Train A				
	Train A is in	Level 1 mode FS			
	Train A is in	rear of signal S1			
		ory <freight freight="" g="" p="" passenger=""> is selected of</freight>			
		ations are filled in before performing the test sc	enarios		
Sequences of the test scena	rio				
Step Step description		Description of what to be tested	Statement	Comment	
1 Signaller opens s	gnal S1.	Train A receives an MA with a packet 27 including	Pass / Fail		
		train category speed restriction.			
	passes the signal S1	The speed is limited at <train category="" max<="" td=""><td>Pass / Fail</td><td></td></train>	Pass / Fail		
and panel P1.		speed> km/h at panel P1.			
Test scenario finished					



4.1.2	Scenario diagram		
			None
E' I	00.1	T	
Final	State	Train in level1 FS beyond panel P1	




4.2 Test ESC_L1FS_2: IREPOS

4.2.1 Description

ID		Date			Location / Line		
ESC_L1F	-S_2	<dd mm="" yyyy=""></dd>	<line></line>				
Description	on	Functionalities tested	:		·		
		 Test ESC_L: 	1FS_2: IREPOS				
		The section betwee	en signals S1 and S2 is a regrouped section. Tl	ne itinerary passing by	track <track number=""/> (track		
		A) is the longest itir	nerary of the regrouped itineraries.				
		_	ID_C NID_BG>) sends IREPOS information <	distance signal/BG>m	upwards signal S1.		
Signal pa	ssed						
Name				Trackside datafile in se	ervice		
	: <signal name=""> is o</signal>	-					
Signal S2	2: <signal name=""> is o</signal>	closed					
Test Scer							
Starting c	condition	Train is upwards sign					
		The route is set betw	een S1 and S2 passing by track A.	en S1 and S2 passing by track A.			
		Be sure all authoris	ations are filled in before performing the test	scenarios			
Sequence	es of the test scenar	io					
Step	Step description		Description of what to be tested	Statement Com	ment		
1	Train passes signa		Passing S1, the MA has the length of the	Pass / Fail			
		REPOS information	shortest itinerary to the signal S2, and the				
	when passing IREF	POS BG.	IREPOS BG is linked with identifier				
			"UNKNOWN".				
			Passing the IREPOS BG, the length of the				
			current section is extended by <difference of<="" td=""><td></td><td></td></difference>				
			distance between regrouped routes>m.				
2 Signaller opens signal S2 then train		signal S2 then train	The MA is extended downwards signal S2	Pass / Fail			
T 1	passes signal S2.						
Test scen	nario finished						



4.2.2 Scenario diagram

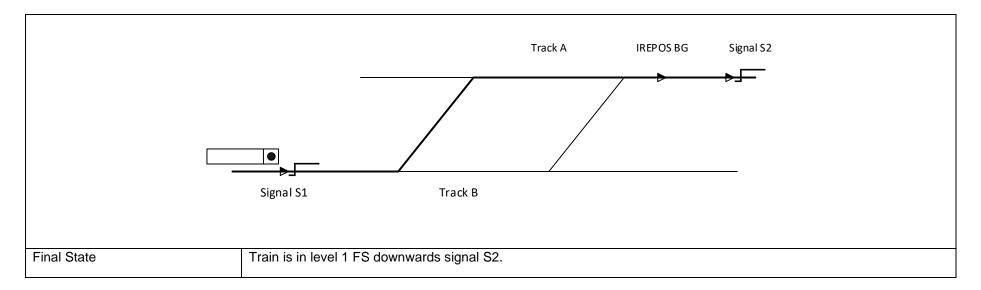




4.3 Test ESC_L1FS_2_part 2: IREPOS

4.3.1 Description

ID		Date			Location / Line		
ESC_L1I	FS_2_part2	<dd mm="" yyyy=""></dd>	<line></line>				
Descripti	on	Functionalities tested	:		·		
		Test ESC_L:	1FS_2: IREPOS				
		The section betwee	en signals S1 and S2 is a regrouped section. T	ne itinerary passing by	rack <track number=""/> (track		
		A) is the longest itir	nerary of the regrouped itineraries.				
		The IREPOS BG (<n< td=""><td>ID_C NID_BG>) sends IREPOS information <</td><td>distance signal/BG>m ι</td><td>ıpwards signal S1.</td></n<>	ID_C NID_BG>) sends IREPOS information <	distance signal/BG>m ι	ıpwards signal S1.		
Signal pa	assed						
Name				Trackside datafile in se	vice		
	1: <signal name=""> is o</signal>	-					
Signal S2	2: <signal name=""> is o</signal>	closed					
Test Sce							
Starting of	condition	Train is upwards sign	al S1 in ETCS 1 FS.				
		The route is set between	een S1 and S2 passing by track A.				
		Be sure all authoris	ations are filled in before performing the test	scenarios			
Sequenc	es of the test scenar	io					
Step	Step description		Description of what to be tested	Statement Comm	nent		
1		al S1 while the signal	The MA has the length of the shortest itinerary	Pass / Fail			
	S2 is closed.		to the signal S2, and the IREPOS BG is linked with identifier "UNKNOWN".				
2	Before the train re	eaches the IREPOS	The MA is extended beyond the signal S2	Pass / Fail			
	BG, the signal S2 is open.		(infill information is accepted) and the length				
Train passes the IREPOS BG receiving			of the current section is extended by				
	IREPOS information.		<difference between="" distance="" of="" regrouped<="" td=""><td></td><td></td></difference>				
			routes>m.				
T (.							
l est scel	nario finished						



4.3.2 Scenario diagram

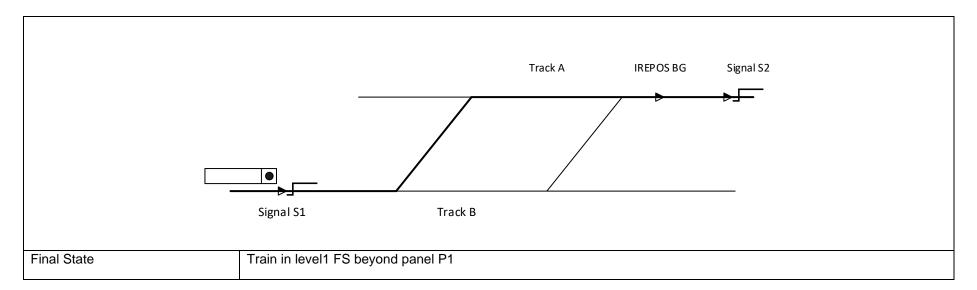




4.5 Test ESC_L1FS_4: Crossing closed non-permissive signal without override

4.5.1 Description

ID	Date				Location / Line		
ESC_L1FS_4	<dd mm="" yyyy=""></dd>				<line></line>		
Description	Functionalities tested	l:			·		
	Test ESC_L1FS_4: Crossing closed non-permissive signal without override						
Signal passed							
Name			Trackside datafile ir	n service			
S1: <signal name=""> is a clo</signal>	sed-controlled main stop	p signal.					
Test Scenarios							
Starting condition Train is : • in level 1 FS		upwards signal S1.					
0		ations are filled in before	performing the tes	st scenarios.			
Sequences of the test scena	ario	Description of what to be	tootod	Statement	Comment		
Step Step description		Description of what to be			Comment		
Train passes signal S1 without activation of the override. The train should be at low speed when passing the signal.		Train is tripped and emergenc	y brakes are applied.	Pass / Fail			
Test scenario finished	Fest scenario finished						



4.5.2 Scenario diagram

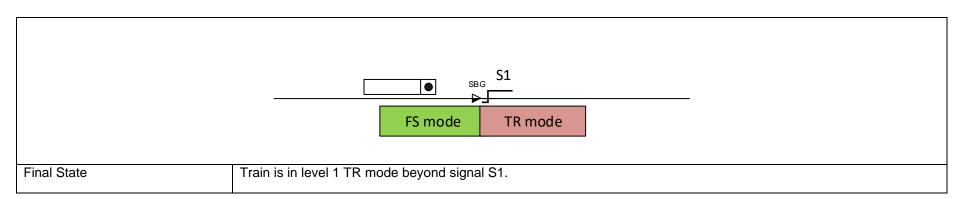




4.6 Test ESC_L1FS_5: Crossing closed non-permissive signal with override

4.6.1 Description

ID		Date				Loca	ation / Line
ESC_L1F	FS_5	<dd mm="" yyyy=""></dd>				<lin< td=""><td>e></td></lin<>	e>
Description	on	Functionalities tested	:			·	
		 Test ESC_L1F 	S_5: Crossing closed no	on-permissive signal	with override		
Signal pa	assed						
Name				Trackside datafile in	service		
S1 : < Sig	nal name> is a close	ed-controlled main stop	signal.				
Test Sce	narios						
Starting of	Starting condition Train is: in level 1 FS at standstill u		mode pwards signal S1.				
		Be sure all authoris	ations are filled in befor	e performing the test	scenarios.		
Sequenc	es of the test scenar	io					
Step	Step description		Description of what to be	e tested	Statement	Comment	
Train passes signal S1 at low speed after activation of the override.		Train changes to SR mode.		Pass / Fail			
Test scer	Test scenario finished						



4.6.2 Scenario diagram

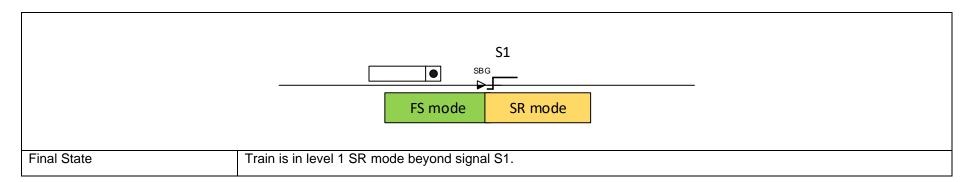




4.7 Test ESC_L1FS_6: Crossing a closed permissive signal

4.7.1 Description

ID	Date	Date L				
ESC_L1FS_6	<dd mm="" yyyy=""></dd>				<line></line>	
Description	Functionalities tested	:			•	
	Test ESC_L1F	S_6: Crossing a closed permis	sive signal			
Signal passed						
Name		Trac	ckside datafile in s	service		
S1: <signal name:<="" td=""><td>is a closed-non controlled main</td><td>stop signal.</td><td></td><td></td><td></td></signal>	is a closed-non controlled main	stop signal.				
S2: <signal name:<="" td=""><td>is an open main stop signal. Ec</td><td>quipped with an IBG</td><td></td><td></td><td></td></signal>	is an open main stop signal. Ec	quipped with an IBG				
Test Scenarios						
j	at standstill u	mode (or SR mode). upwards signal S1. ations are filled in before per	forming the test	scenarios.		
Sequences of the to	est scenario					
Step Step des	cription	Description of what to be tester	ed	Statement	Comment	
	ses signal S1 at low speed without of the override.	Train changes to OS mode.		Pass / Fail		
2 The train p	passes IBG of S2.	Train rejects the infill information.		Pass / Fail		
3 Train conti	inues and passes S2.	Train changes to FS mode, extendin	g the MA length.	Pass / Fail		
Test scenario finish	ned					



4.7.2 Scenario diagram

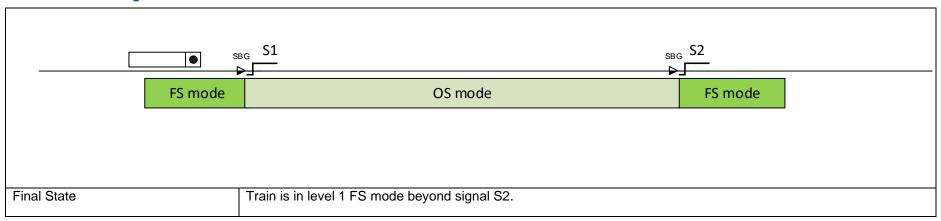



4.8 Test ESC_L1FS_7 : CR819

4.8.1 Description

ID		Date				Location / Line
ESC_L1FS	S_7	<dd mm="" yyyy=""> <line></line></dd>				
Description	n	Functionalities tested	:			
		- ESC_L1FS_	7 : CR819			
		-	_	-		led correctly but the duplicated balise
		is, then the message	shall not be rejected and n	o linking reaction sha	ll be applied.	
Signal pas	sed					
Name				Trackside datafile in s	service	
Test Scena	arios					
Starting co	ondition	Train is in level 1 mod	de FS upwards a fixed balis	se group sending a te	xt message.	
		A cover is installed or	n the first balise of the fixed	fixed BG ($N_PIG = 0$).		
		Be sure all authoris	ations are filled in before	performing the test	scenarios	
Sequence	s of the test scenar	io				
Step	Step description		Description of what to be	tested	Statement	Comment
1	Train passes the fixed BG		No linking reaction oc	curs and the text	Pass / Fail	
			message <text bg="" by="" send="" the=""> is displayed</text>			
on			on the DMI.			
Test scena	ario finished					

4.8.2 Scenario diagram

	none
Final State	Train in level 1 FS beyond fixed BG



4.9 Test ESC_L1FS_8: Intentionally deleted

4.10 Test ESC_TR_5 : Transition Level 1 FS to TVM430

4.10.1 Description


ID		Date					Location / Line	
ESC_TR	_5	<dd mm="" yyyy=""></dd>					<line></line>	
Description	on	Functionalities tested	:					
		- ESC_TR_5:	Transition Level 1 FS to T	VM430.				
		This test case is only	required for trains running	g through line 1 (Only I	ine equipped with	TVM430	on the Infrabel network).	
Signal pa	assed							
Name				Trackside datafile in	service			
S1 : < S ig	nal name of the last	signal> is open preser	nting Y aspect.					
Test Sce								
Starting of	condition	Train in level 1 FS						
		All signals or marker	poard are at Open Proceed to permit the train to ride at full speed.					
			ations are filled in before	e performing the test	scenarios			
	es of the test scenar	rio				1		
Step	Step description		Description of what to be		Statement	Commer	nt	
1	•	announcement BG of	Transition is announced		Pass / Fail			
	the transition.		If possible, confirm that					
			equipment switches to Hot Standby.					
	The request for the ac			knowledgment of the				
			transition is displayed.					
2	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Train switches to Level		Pass / Fail			
	•	execution BG of the	equipment is armed afte	r a few seconds.				
	transition.							



	3	Train passes the KVB balise with DVG	The TVM onboard is activated ("contrôle	Pass / Fail	
		function.	d'armement" is activated), no expected		
			reaction.		
ĺ	Test scer	nario finished		<u>. </u>	



4.10.2 Scenario diagram

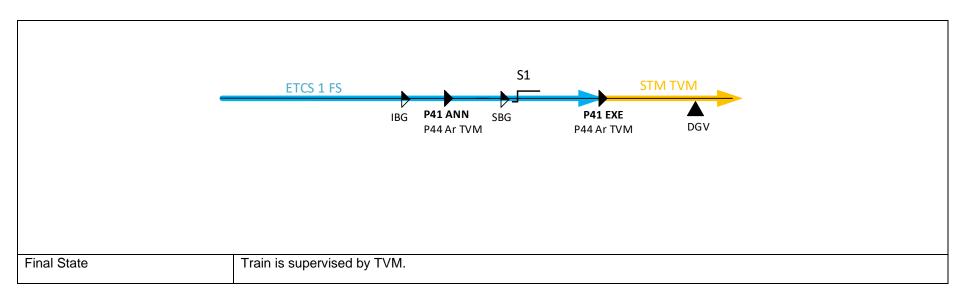




4.11 Test ESC_TR_7.1: Transition TVM430 to Level 1 FS

4.11.1 Description

ID		Date					Location / Line	
ESC_TR_	_7.1	<dd mm="" yyyy=""> <line></line></dd>				<line></line>		
Description	on	Functionalities tested	:					
		- ESC_TR_7:	Transition TVM to ETCS1	FS				
		This test case is only	required for trains running	through line 1 (Only li	ine equipped wit	h TVM430 d	on the Infrabel network).	
Signal pa	ssed							
Name				Trackside datafile in s	service			
S1 : < S ig	nal name of the last	marker board> is oper	٦.					
S2 : < S ig	nal name of the first	signal> is open.						
Test Scer	narios							
Starting c	condition	Train in level STM un	der TVM supervision	'				
		All signals or marker	poard are at Open Proceed to permit the train to ride at full speed.					
		Be sure all authorisa	ations are filled in before	e performing the test	scenarios			
Sequence	es of the test scenar	io						
Step	Step description		Description of what to be		Statement	Commen	nt	
1	Train passes S1	marker board and	Transition is announced	on the DMI.	Pass / Fail			
	receives a MA and	d an immediate level	an immediate level The request for the acknowledgment of the					
	transition.		transition is displayed.					
2	Driver acknowledge	es the transition.	Train switches to level 1	Pass / Fail				
3	Train passes signa	I S2	Train continues in level 1 FS.				·	
Test scen	nario finished							



4.11.2 Scenario diagram

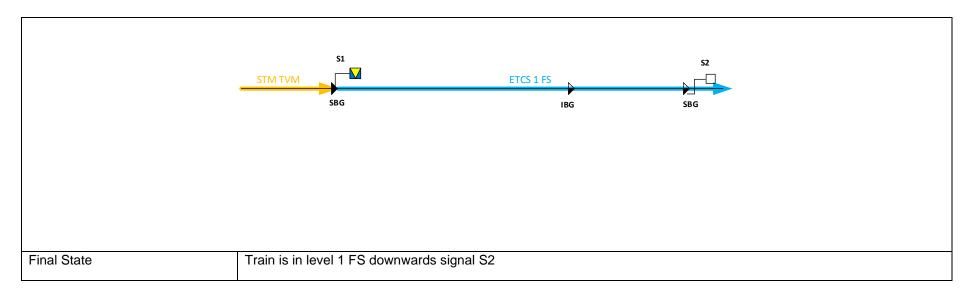




4.12 Test ESC_TR_7.2: Transition TVM430 to Level 1 FS

4.12.1 Description

ID		Date			Location / Line				
ESC_TR_	_7.2	<dd mm="" yyyy=""></dd>	<line></line>						
Description	on	Functionalities tested :							
		- ESC_TR_7: Transition TVM to ETCS1 FS on S2							
	This test case is only required for trains running through line 1 (Only line equipped with TVM430 on the Infrabel network).								
Signal pa	ssed								
Name		Trackside datafile in service							
	\$1: <signal board="" last="" marker="" name="" of="" the=""> is closed (with override lamp on).</signal>								
S2 : < S ig	nal name of th	e first signal> is open.							
Test Scer	narios								
Starting condition		Train in level STM under TVM supervision							
		The marker board S1 is closed, signal S2 is open.							
		Be sure all authorisations are filled in before performing the test scenarios							
Sequence	es of the test s	cenario							
Step	Step descript	ion	Description of what to be tested	Statement	Comment				
1	Train passes	S1 marker board with override	Train continues in STM TVM	Pass / Fail					
	and receives no ETCS transition								
2	Train passes	KVB_FGV balise	"Contrôle armement" is deactivated.	Pass / Fail					
3	Train passes TVM_ESNCB loop		TVM cab signalling turns off.	Pass / Fail					
4	Train passes	signal S2 and receives a MA	Train switches to level 1 FS. The	Pass / Fail					
	and an immediate level transition.		request for the acknowledgment of						
			the transition is displayed.						
5	Driver acknowledges the transition.		Train continues in level 1 FS.	Pass / Fail					
Test scen	ario finished								



4.12.2 Scenario diagram

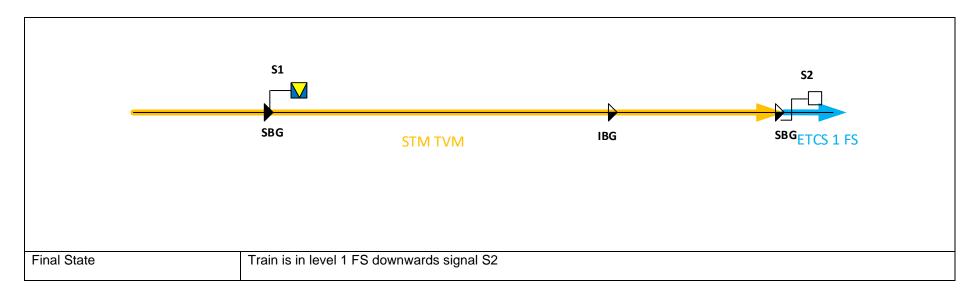




4.13 Test ESC_TR_12: Transition ETCS1 FS to STM TBL1+

4.13.1 Description

ID		Date				L	ocation / Line	
ESC_TR	_12	<dd mm="" yyyy=""></dd>				<	Line>	
Description	on	Functionalities tested :						
		- ESC_TR_12 : Transition ETCS1 FS to STM TBL1+						
	Remark: if test case is executed in CVT track, a text message "=>S*" is displayed between from reception of the transition							
	to the first TBL1+ signal. An acknowledgment of the text message is required.							
Signal no	Signal passed							
Name	asseu			Trackside datafile in s	convice			
S1: <signal name=""> is open. It is the last ETCS1 FS</signal>			cianal	Trackside dataille iii s	Service			
31. <319	griai riairie> is operi.	ILIS LITE IASL ETCOT FO	signal.					
Test Sce	narios							
	Starting condition Train is in level 1 mode FS upwards signal S1.							
Ctarting	Starting condition		20 1 0 apwarao oigilai 01.					
Be sure all authoris		ations are filled in before performing the test scenarios						
Sequenc	es of the test scenar			<u> </u>				
Step	_ ·		Description of what to be tested		Statement	Comment		
1	1 Train passes signal S1 and the level transition announcement fixed BG at the		Train receives a transition execution to level STM. A level transition announcement is		Pass / Fail			
Ac		displayed on the DMI.						
		Acknowledgement is possible about 5						
		seconds after receiving the announcement.						
2	_	ge the transition and			Pass / Fail			
	•	ne level transition	The possible STM are in	_				
	execution BG.		priority: TBL1+, TBL2, T	BL1, Memor, KVB.				
Test scer	nario finished							



4.13.2 Scenario diagram

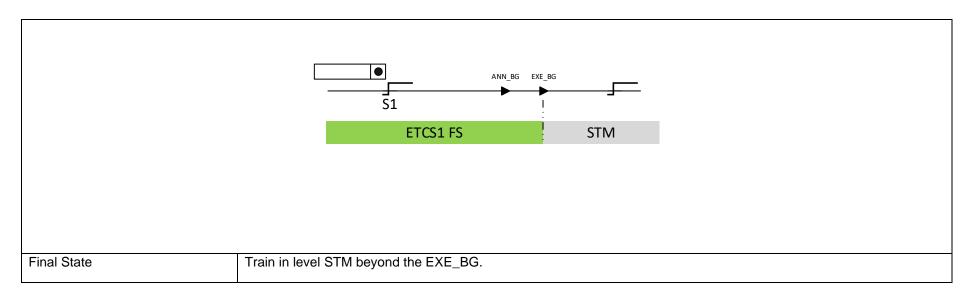



4.14 Test ESC_TR_15: Transition STM TBL1+ to ETCS1 FS

4.14.1 Description

ID		Date				Location / Line		
ESC_TR_	_15	<dd mm="" yyyy=""></dd>	<line></line>					
Description	on	Functionalities tested :						
		- ESC_TR_15 Transition STM TBL1+ to ETCS1 FS						
Signal pa	ssed							
Name				Trackside datafile in service				
S1: <signal name=""> is open. It is the first ETCS1 signal</signal>								
S2: <signal name=""> is open</signal>								
Test Scer	narios							
Starting c	Starting condition Train is in level STM		in rear of signal S1.					
ı		The possible STM are in descending order of priority: TBL1+, TBL2, TBL1, Memor, KVB.						
,		Be sure all authorisations are filled in before performing the test scenarios						
Sequence	es of the test scena	rio						
Step	Step description		Description of what to be tested		Statement	Comment		
1	Train passes signal S1		Train switches to level 1 FS mode.		Pass / Fail			
2	Drivers acknowledges transition		Train remains in level 1 FS mode.		Pass / Fail			
Test scen	nario finished				<u> </u>	·		



4.14.2 Scenario diagram

